

Job Name	Location	Date
Purchaser	Engineer	
Submitted To	For	<input type="checkbox"/> Reference <input type="checkbox"/> Approval <input type="checkbox"/> Construction
Unit Designation	Schedule No.	

Submittal: MBRS36HPJ10A

36,000 BTU/H MULTI-ZONE Wall Mounted Heat- Pump System



Indoor System

Non-Ducted Indoor Match with BRS Indoor Units Only

Rated Cooling Capacity	34,000 BTUH
Cooling Capacity (min-max)	8,871-35,826 BTUH
Rated Heating Capacity	42,500 BTUH
Heating Capacity (min-max)	8,871-44,356 BTUH
SEER/EER	21.0/12.5
HSPF/COP	11.5/3.7

Outdoor Unit Data

Compressor Style	Inverter Driven Rotary	
	RLA	15.6
Compressor Crankcase and Base Pan Heaters		
Fan Motor		
	Output Power	170 W
	FLA	0.8 A
	Air Flow (Max)	4,531 CFM
Sound Levels		
Cooling	dB(A)	61
Heating	dB(A)	61
Dimensions & Weights		
Unit Dimensions (LxHxD)	42.8 x 43.4 x 17.3-in	
Weight (Net/Shipping)	198.4/216.0-lbs	
Min. Number of Indoor Units	2	
Max. Number of Indoor Units	5	
Operating Range		
Cooling	(min-max)	0° ~ 118°F
		-18° ~ 48°C
Heating	(min-max)	-5° ~ 86°F
		-21° ~ 30°C

OPERATIONAL CHARACTERISTICS

- Up to Five Indoor Units (5-Port)
- EnergyStar Rated
- Inverter Technology
- Quiet Operation - Both Indoor & Outdoor
- Anti-Corrosion Coil Protection
- Intelligent Defrost
- Auto Restart on Power Outages
- Multit-point Diagnostics
- Limited 3 Yr Parts / 5 Yr Compressor Warranty



AHRI Certified Ref No: [205818831](#) (non-ducted)

Power Supply

Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz
Voltage Range	187 - 253 V
Main Power Wire Size	8-2 AWG
Interconnecting Cable Wire Size	14-4 AWG
MCA	23.0 A
MOCP/Breaker Size	35 A

Refrigerant Piping Data

Refrigerant Type	R410A
Refrigerant Charge	128.8
Additional Charge Per Line Length	0.21-oz/ft
Connection Method	Flared
Factory Charge for Total Line Length	131-ft
Total Refrigerant Pipe Length	246-ft
Max Refrigerant Piping Length to any Indoor Unit	82-ft
Min Refrigerant Piping Length to any Indoor Unit	10-ft
Max Elevation between Indoor Units	25-ft
Max Lift from Outdoor to Indoor Unit	49-ft
Max Drop from Outdoor to Indoor Unit	49-ft



SYSTEM FEATURES	
Inverter / Compressor Type	Inverter Rotary
Ultra Low Frequency Torque Control	YES
Power Factor Correction	YES
Refrigerant Type	R410A
Basepan With Electric Heater	YES
Compressor With Electric Heater	YES
Condenser Fan	Axial
Condenser Motor Type	DC
Condenser Motor Drive	Direct
Condenser Coil	Aluminum Fin/Copper Tube
Outdoor Fin Coating (Blue)	Acrylic Resin
Intelligent Defrosting	YES
Low Voltage Startup	YES
Memory/Power Failure Recovery	YES
Self Diagnosis	YES
Low Ambient Cooling	YES

REMOTE CONTROLLER FUNCTIONS¹	See individual Indoor Unit Controllers Functions
--	--

¹ Not all Remote Controller functions are supported.


OUTDOOR UNIT DIMENSIONAL SPECIFICATIONS

MBRS36HPJ10A

Units: inch

36,000 BTUH MODEL

Model # MBRS36HPJ10A 36,000 BTUH 230V

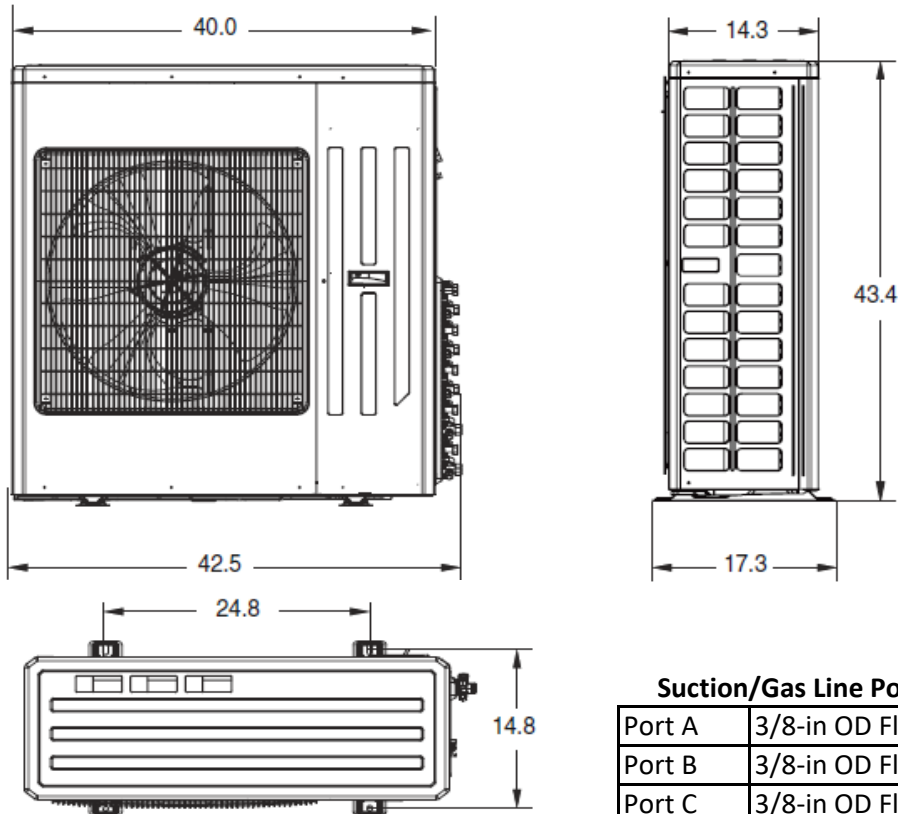

Weight (Net/Shipping)	198.4/216.0 lbs
-----------------------	-----------------

Suction/Gas Line Port Size

Port A	3/8-in OD Flared
Port B	3/8-in OD Flared
Port C	3/8-in OD Flared
Port D	3/8-in OD Flared
Port E	3/8-in OD Flared

Factory Supplied Piping Adapters


Adapter	P/N	Qty
3/8 (F) to 5/8 (M)	6654100009	2
3/8 (F) to 1/2 (M)	6654100013	4
1/4 (F) to 3/8 (M)	6654104	2

Liquid Line Port Size

Port A	1/4-in OD Flared
Port B	1/4-in OD Flared
Port C	1/4-in OD Flared
Port D	1/4-in OD Flared
Port E	1/4-in OD Flared

MINIMUM SPACING REQUIREMENTS

Units: inch (m)

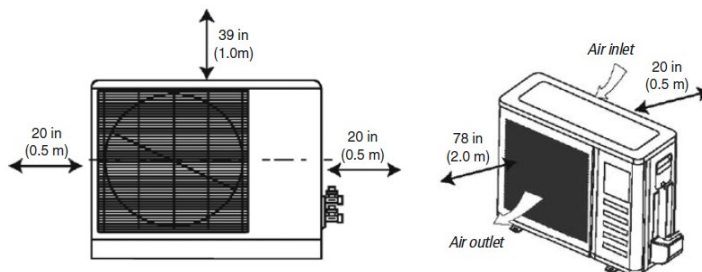

Notes:

1. Recommended Interconnecting Cable Type Stranded Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

COOLING CAPACITY (BTUH)

Indoor Units Combinations	Rated System Capacity (BtuH)	Indoor Unit A (BtuH)	Indoor Unit B (BtuH)	Indoor Unit C (BtuH)	Indoor Unit D (BtuH)	Indoor Unit E (BtuH)
9	9,000	9,000	NA	NA	NA	NA
12	12,000	12,000	NA	NA	NA	NA
18	17,000	17,000	NA	NA	NA	NA
24	20,000	20,000	NA	NA	NA	NA
9+9	18,000	9,000	9,000	NA	NA	NA
9+12	21,000	9,000	12,000	NA	NA	NA
9+18	25,500	8,000	17,500	NA	NA	NA
9+24	26,300	7,000	19,300	NA	NA	NA
12+12	24,000	12,000	12,000	NA	NA	NA
12+18	28,400	11,400	17,000	NA	NA	NA
12+24	30,000	10,000	20,000	NA	NA	NA
18+18	30,600	15,300	15,300	NA	NA	NA
18+24	33,100	14,200	18,900	NA	NA	NA
24+24	33,600	16,800	16,800	NA	NA	NA
9+9+9	24,600	8,200	8,200	8,200	NA	NA
9+9+12	24,900	7,500	7,500	9,900	NA	NA
9+9+18	29,700	7,200	7,200	15,300	NA	NA
9+9+24	30,900	6,600	6,600	17,700	NA	NA
9+12+12	29,600	8,000	10,800	10,800	NA	NA
9+12+18	31,900	7,400	9,800	14,700	NA	NA
9+12+24	34,100	6,800	9,100	18,200	NA	NA
9+18+18	33,900	6,500	13,700	13,700	NA	NA
12+12+12	31,200	10,400	10,400	10,400	NA	NA
12+12+18	32,720	9,360	9,360	14,000	NA	NA
12+12+24	32,900	8,300	8,300	16,300	NA	NA
12+18+18	32,760	8,160	12,300	12,300	NA	NA
9+9+9+9	34,000	8,500	8,500	8,500	8,500	NA
9+9+9+12	34,290	7,830	7,830	7,830	10,800	NA
9+9+9+18	34,072	6,824	6,824	6,824	13,600	NA
9+9+12+12	34,040	7,300	7,300	9,720	9,720	NA
9+9+12+18	34,600	6,500	6,500	8,640	12,960	NA
9+12+12+12	34,440	6,840	9,200	9,200	9,200	NA
12+12+12+12	35,040	8,760	8,760	8,760	8,760	NA
9+9+9+9+9	34,500	6,900	6,900	6,900	6,900	6,900
9+9+9+9+12	35,720	6,500	6,500	6,500	6,500	9,720

Note:

1) It is critical to size the outdoor unit for the entire building load and each indoor unit for its individual zone load.

Cooling Nominal Test Conditions: Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs

without notice or without incurring obligations. All rights reserved.

HEATING CAPACITY (BTUH)

Indoor Units Combinations	Rated System Capacity (BtuH)	Indoor Unit A (BtuH)	Indoor Unit B (BtuH)	Indoor Unit C (BtuH)	Indoor Unit D (BtuH)	Indoor Unit E (BtuH)
9	9,500	9,500	NA	NA	NA	NA
12	13,000	13,000	NA	NA	NA	NA
18	18,500	18,500	NA	NA	NA	NA
24	22,000	22,000	NA	NA	NA	NA
9+9	19,000	9,500	9,500	NA	NA	NA
9+12	22,500	9,500	13,000	NA	NA	NA
9+18	27,800	9,300	18,500	NA	NA	NA
9+24	29,600	8,000	21,600	NA	NA	NA
12+12	26,000	13,000	13,000	NA	NA	NA
12+18	29,500	12,000	17,500	NA	NA	NA
12+24	33,200	11,200	22,000	NA	NA	NA
18+18	35,000	17,500	17,500	NA	NA	NA
18+24	36,000	15,000	21,000	NA	NA	NA
24+24	38,000	19,000	19,000	NA	NA	NA
9+9+9	27,000	9,000	9,000	9,000	NA	NA
9+9+12	28,800	9,000	9,000	10,800	NA	NA
9+9+18	35,000	8,800	8,800	17,400	NA	NA
9+9+24	36,600	7,800	7,800	21,000	NA	NA
9+12+12	33,000	9,000	12,000	12,000	NA	NA
9+12+18	35,150	8,650	11,200	15,300	NA	NA
9+12+24	37,640	7,900	9,240	20,500	NA	NA
9+18+18	37,960	7,560	15,200	15,200	NA	NA
12+12+12	36,000	12,000	12,000	12,000	NA	NA
12+12+18	37,200	10,600	10,600	16,000	NA	NA
12+12+24	38,000	9,500	9,500	19,000	NA	NA
12+18+18	38,300	9,300	14,500	14,500	NA	NA
9+9+9+9	42,000	10,500	10,500	10,500	10,500	NA
9+9+9+12	42,000	9,600	9,600	9,600	13,200	NA
9+9+9+18	41,940	8,400	8,400	8,400	16,740	NA
9+9+12+12	42,000	9,000	9,000	12,000	12,000	NA
9+9+12+18	42,680	8,000	8,000	10,680	16,000	NA
9+12+12+12	40,800	8,100	10,900	10,900	10,900	NA
12+12+12+12	42,720	10,680	10,680	10,680	10,680	NA
9+9+9+9+9	42,750	8,550	8,550	8,550	8,550	8,550
9+9+9+9+12	42,240	7,920	7,920	7,920	7,920	10,560

Note:

- 1) It is critical to size the outdoor unit for the entire building load and each indoor unit for it's individual zone load.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

COOLING PERFORMANCE

		Indoor Ambient Temperature											
		70°F (21°C)			75°F (24°C)			80°F (27°C)			90°F (32°C)		
		59°F (15°C)			63°F (17°C)			67°F (19°C)			73°F (23°C)		
DB	WB	TC	SC	Input Power	TC	SC	Input Power	TC	SC	Input Power	TC	SC	Input Power
		(BtuH)	(BtuH)	(watts)	(BtuH)	(BtuH)	(watts)	(BtuH)	(BtuH)	(watts)	(BtuH)	(BtuH)	(watts)
Outdoor Ambient Temperature (DB)	-0.4°F (-18°C)	20,420	16,010	1,200	23,030	18,060	1,270	24,340	19,090	1,320	27,430	21,510	1,410
	5°F (-15°C)	20,940	16,420	1,200	23,620	18,530	1,280	25,270	19,820	1,320	28,130	22,030	1,410
	14°F (-10°C)	21,690	17,010	1,220	24,470	19,190	1,300	25,860	20,280	1,340	29,150	22,860	1,440
	23°F (-5°C)	23,770	18,640	1,220	27,080	21,240	1,300	29,130	22,840	1,330	32,040	25,130	1,430
	32°F (0°C)	24,979	19,588	1,222	28,455	22,319	1,291	29,261	22,943	1,335	33,681	25,057	1,395
	41°F (5°C)	26,260	20,593	1,285	29,914	23,463	1,358	30,762	24,119	1,403	35,409	26,342	1,467
	50°F (10°C)	27,355	21,451	1,338	31,161	24,441	1,414	32,043	25,124	1,462	36,884	27,440	1,528
	59°F (15°C)	28,820	22,600	1,410	32,830	25,750	1,490	33,760	26,470	1,540	38,860	28,910	1,610
	68°F (20°C)	32,620	29,556	2,010	33,422	30,044	1,995	34,582	31,733	2,010	41,526	33,695	2,025
	77°F (25°C)	35,145	30,300	2,450	39,240	31,409	2,435	38,796	32,791	2,440	45,040	34,872	2,430
	86°F (30°C)	35,486	30,368	3,120	38,438	32,364	3,125	38,984	33,012	3,160	45,211	34,650	3,185
	95°F (35°C)	32,176	28,781	3,300	35,827	31,255	3,400	36,083	31,921	3,335	41,014	34,275	3,405
	104°F (40°C)	27,451	26,444	3,075	30,095	28,543	3,085	30,795	29,856	3,115	35,452	32,671	3,145
113°F (45°C)	23,544	23,203	2,765	25,642	24,926	2,790	26,956	25,779	2,800	29,686	28,833	2,825	
118°F (48°C)	16,382	16,232	1,856	17,504	17,242	1,911	19,040	18,354	1,986	20,186	19,923	2,023	

HEATING PERFORMANCE

		Indoor Ambient Temperature											
		70°F (21°C)			75°F (24°C)			80°F (27°C)			90°F (32°C)		
		59°F (15°C)			63°F (17°C)			67°F (19°C)			73°F (23°C)		
DB	WB	TC	Input Power	COP	TC	Input Power	COP	TC	Input Power	COP	TC	Input Power	COP
		(BtuH)	(watts)		(BtuH)	(watts)		(BtuH)	(watts)		(BtuH)	(watts)	
Outdoor Ambient Temperature (DB)	-5°F (-21°C)	18,126	1,620	3.28	17,756	1,650	3.15	17,059	1,680	2.98	16,652	1,710	2.85
	0°F (-18°C)	18,500	1,650	3.29	17,960	1,680	3.13	17,630	1,740	2.97	17,160	1,780	2.83
	5°F (-15°C)	19,510	1,720	3.32	18,950	1,750	3.17	18,590	1,820	2.99	18,110	1,860	2.85
	7°F (-14°C)	20,010	1,750	3.35	19,050	1,790	3.12	19,360	1,870	3.03	18,860	1,920	2.88
	17°F (-8°C)	20,940	1,790	3.43	20,330	1,830	3.26	19,950	1,900	3.08	19,420	1,940	2.93
	28°F (-2°C)	23,660	1,910	3.63	23,040	1,950	3.46	22,380	2,020	3.25	22,110	2,070	3.13
	38°F (3°C)	29,420	2,200	3.92	28,800	2,240	3.77	28,140	2,330	3.54	27,870	2,380	3.43
	47°F (8°C)	33,250	2,290	4.26	32,240	2,330	4.06	31,600	2,420	3.83	30,730	2,480	3.63
	57°F (14°C)	34,350	2,330	4.32	33,310	2,380	4.10	32,650	2,470	3.87	31,740	2,520	3.69
	68°F (20°C)	35,750	2,410	4.35	34,660	2,460	4.13	33,970	2,550	3.90	33,030	2,610	3.71
	77°F (25°C)	36,580	2,470	4.34	35,470	2,520	4.13	34,760	2,620	3.89	33,800	2,680	3.70

LEGEND

- DB --- Dry Bulb
- WB --- Wet Bulb
- TC --- Total Capacity (BtuH)
- SC --- Sensible Capacity (BtuH)
- Input Power---(Watts)
- COP---Coefficient Of Performance

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.

- 1. SEE INDIVIDUAL INDOOR UNIT
SUBMITTALS FOR DIMENSIONS**
- 2. LINE SETS MUST BE SIZED TO
INDOOR UNIT CONNECTIONS**
- 3. PERFORMANCE RATINGS OF
SYSTEMS ARE BASED ON THE
OUTDOOR UNIT
(SEE PAGE 1 AND AHRI SYSTEM DOCUMENTS)**